Huawei Tecal RH1285 Rack Server

Making IT infrastructure more convenient and green

HUAWEI TECHNOLOGIES CO., LTD.

Huawei Tecal RH1285 Rack Server

Huawei Tecal RH1285

Are you seeking a cost-effective 1U server?

Huawei Tecal RH1285 rack server is compact and cost-effective server that applies to enterprise department-level IT infrastructure.

Excellent computing capability

- Supports two Intel® Xeon® 5600 series quad-core or six-core CPUs. The maximum main frequency is 2.93 GHz. Each CPU provides the level-3 caching of 12 MB.

- Supports 12 DDR3 RDIMMs or UDIMMs and provides a maximum memory capacity of 192 GB. This provides a high performance computing platform for users.

High reliability storage

- Supports four hot-swappable 2.5-inch or 3.5-inch SAS or SATA hard disks to provide a storage capacity of 4 TB (SAS hard disk) or 8 TB (SATA hard disk).

- Supports RAID functions based on configured RAID cards.

- Supports power-off protection to ensure data security and reliability.

Differentiation high performance solution

- Huawei value-added products such as the iNIC help solve the network performance bottleneck and reduce the TCO.

Energy-saving server

- Adjusts the fan speed based on the key component temperature to reduce the power consumption and noise.

- Supports CPU frequency-lowering to reduce system power consumption in the case of lower load.

- Uses the high-efficient Platinum power modules to save energy and improve the AC/DC power conversion efficiency up to 94%.

Easy management and maintenance

- Integrates the BMC on the main board and complies with the IPMI 2.0 standards.

- Provides independent 10/100 M Ethernet management ports.

- Supports KVM over IP and virtual media.

Technical specifications

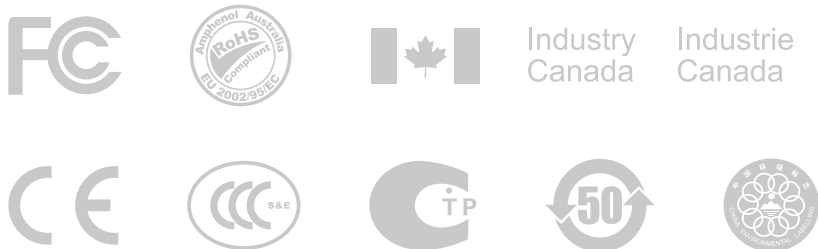| Item	Specifications
Form Factor	1U rack
Power Supply	High-efficient Platinum power modules, AC/DC power conversion efficiency up to 94%
Processor	2 Intel® Xeon® 5600 series quad-core/six-core processors.
Memory	Up to 192 GB (12 DIMM slots): 1GB/2GB/4GB/8GB/16GB DDR3 up to 1333MHz
Hard drive	4 hot-plug 2.5" /3.5" SAS/SATA hard drives. RAID0/ 1/ 10/ 5/ 50 and 512 MB cache supported with RAID card
Expansion	• 1 standard PCIe x8 slot, optional 10GE and FC HBA.
I/O	• Embedded Dual-port Gigabit Ethernet. TOE supported • 4 USB 2.0 ports • One 10/100 MB management network, one DB9 serial port, one DB15 VGA port.
Management	• BMC, IPMI2.0, KVM Over IP, virtual CD-ROM drive compliant • Independent 10/100M out-of-band management network port and CLI management port. • IP address changeable in BIOS for management network port. DHCP mode supported.
Operation System	Microsoft® Windows® Sever 2003 R2 Enterprise Microsoft® Windows Server® 2008 SP2 Microsoft® Windows Server® 2008 R2 Red Hat® Enterprise Linux® Novell® SUSE® Linux® Enterprise Server Vmware® ESX® Oracle® Enterprise Linux® Ubuntu® Server CentOS® Linux® Sun Microsystems® Solaris®

Protocols Compliance

US / America	FCC CFR47 Part 15 Class A
Canada	ICES-003 Class A

Europe	WEEE :2002/96/EC
	RoHS :2002/95/EC
	REACH: EC 1907/2006
	CE : EN 60950-1:2006 2nd Ed
	    EN 55022:2006 + A1:2007 (Class A)
	    EN 55024:1998 + A1:2001 + A2:2003
	    EN 61000-3-2:2006
	    EN 61000-3-3:1995 +A1:2001 +A2:2005

China	CCC: GB4943-2001; GB9254-2008(CLASS A); GB17625.1-2003 RoHS: SJ/T-11363—2006; SJ/T-11364—2006
Russia	GOST: GOST R IEC60950-1-2009; GOST 26329-84; GOST R 51318.22-2006; GOST R 51318.24-99; GOST R 51317.3.2-2006; GOST R 51317.3.3-2008

For more information, you can:

Dial Huawei customer service telephone number 0086-755-28560000 or 400830218, or contact Huawei engineers working in local offices.

Visit http://support.huawei.com/support/.

HUAWEI TECHNOLOGIES CO.,LTD.
Huawei Industrial Base
Bantian Longgang
Shenzhen 518129,P.R.China
Tel: +86 755 28780808

www.huawei.com